


# GS 94

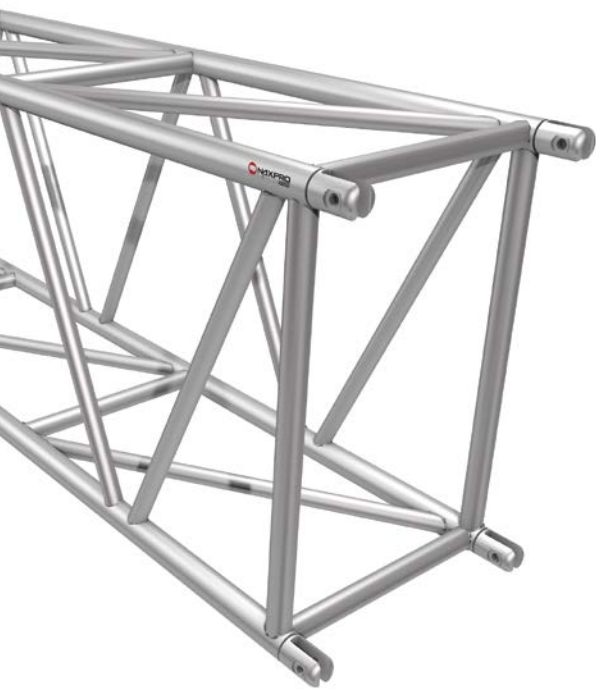

## Naxpro-Truss GS 94 Truss System


The heavy-duty truss Naxpro-Truss GS 94 offers with a special combination of an extra strong connection system and a massive tube a maximum of load options. GS stands for Gabelsystem (fork system) and offers with a massive tube of 60 x 5 mm exceptionally high payload values.

Naxpro-Truss GS 94 is therefore ideally suited for the stage roof constructions, large ground supports, cable bridges, antenna towers and all other truss structures, in which maximum spans and payloads are required. To connect the truss, the forks are pushed together and fixed in position with a plug-in bolt, which allows a convenient and quick assembly.



### Load chart

Span (m)	Distributed load	Deflection	Central single load	Deflection
m	kg/m	mm	kg	mm
10	822,2	24,5	4634,5	22,2
12	636,7	39,7	3820,1	32,1
14	461,7	54,1	3231,7	43,8
16	348,1	70,8	2784,8	57,6
18	270,2	89,7	2432,0	73,3
20	214,5	111,0	2145,2	91,1
22	173,3	134,6	1906,4	111,1
24	142,0	160,6	1703,6	133,3
26	117,6	188,9	1528,5	157,9
28	98,2	219,7	1375,0	184,8
30	82,6	253,0	1239,0	214,4
32	69,8	288,8	1117,2	246,5
34	59,2	327,2	1006,9	281,4
36	50,4	368,1	906,4	319,2
38	42,8	441,7	814,0	360,1
40	36,4	458,1	728,6	404,2

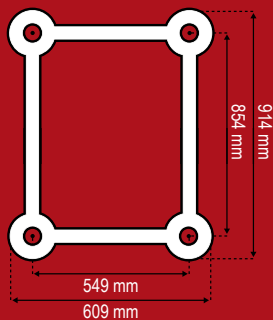

#### Specifications

Width: 609 mm  
 Height: 914 mm  
 Tube: 60 x 5 mm  
 Braces: 40 x 3 mm  
 Alloy: EN-AW 6082 T6

#### Incl. connecting set



High uniformly distributed loads are to be understood ideally distributed. The load application has to be made in the knot. The load values are calculated using 10.9 bolts.

Errors and alteration excepted